


Artikel-Nr. / Article No.	Länge / Length (L)	Farbe / Color
49267	0,5 m	schwarz / black
49268	1,0 m	schwarz / black
49269	2,0	schwarz / black

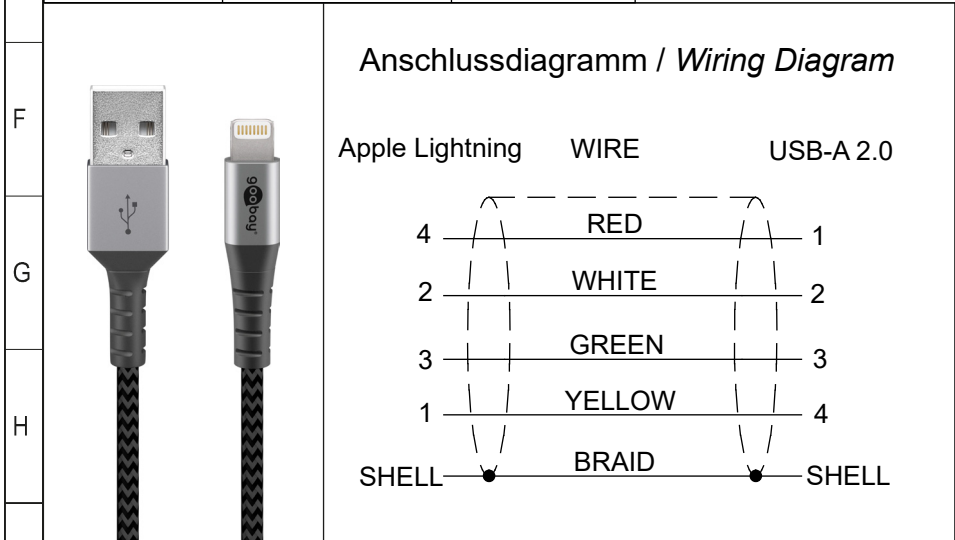

Lightning USB Lade- und Synchronisationskabel

- Ummantelung aus Vollmetall-Wendelprofilen
- mit Apple-MFI-Zertifizierung
- Easy USB-A-Stecker beidseitig verwendbar

Lightning USB charging and sync cable

- sleeving made from all-metal spiral profiles
- with Apple MFI certification
- Easy USB-A plug can be used on both sides

Anschlüsse: Apple Lightning-Stecker, USB 2.0-Stecker (Typ A)

Material Gehäuse:
 Apple Lightning: Aluminiumlegierung, PVC 85 A
 USB-A 2.0: LDPE, Aluminiumlegierung, PVC 85 A

Material Kabelmantel: PVC

Kontakte: vergoldet, vernickelt

max. Datenübertragungsrate: 480 Mbit/s

Konformität: RoHS

Connectors: Apple Lightning plug, USB 2.0 plug (Type A)

Material housing:
 Apple Lightning: aluminium alloy, PVC 85 A
 USB-A 2.0: LDPE, aluminium alloy, PVC 85 A

Material cable jacket: PVC

Contacts: gold-plated, nickel-plated

max. Data rate: 480 Mbit/s

Conformity: RoHS

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.: 18.01.2021	RS	DAT Lightning XXm textil sw/si	1
		gepr.: 18.01.2021	aw		
		Norm:		Zeichnungs-Nr.: 49267, 49268, 49269	von 1
Änderungen vorbehalten / Subject to change					

