


CONTACTS:

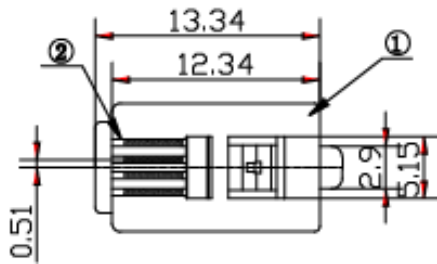

- Westernstecker für Flachkabel
- RJ10 4P4C
- zum Crimpen an telefonflachkabel
- ungeschirmt
- Gehäusematerial: PC (UL94V-2)
- Kontaktmaterial: Phosphorbronze, vergoldet
- max. 250V / 2A
- Isolationswiderstand: min. 1000M Ω
- Kontaktwiderstand: max. 30m Ω

- modular plug for flatcable
- RJ10 4P4C
- for crimping on telephone flat cables
- unshielded
- Housing material: PC (UL94V-2)
- Contact material: phosphor bronze, gold plated
- max. 250V / 2A
- Isolation Resistance: min. 1000M Ω
- Contact resistance: max. 30m Ω

Änderungen

Datum	Name	gez.:	Datum	Name
		gez.:	29.11.2012	tf
		gepr.:	29.11.2012	tf
		Norm:		

Bezeichnung	Blatt
TEL MODU RJ10 4P4C FLAT PLUG	
Zeichnungs-Nr.:	von
50249	

